



## 3406 3/8" HEAVY DUTY AIR MINI IMPACT WRENCH

### 3/8" 槍型氣動扳手(小型強力)

- Free speed: 12500rpm
- Bolt capacity: 5/8"
- Air inlet: 1/4"
- Air pressure: 90~120 psi
- Max torque: 300 ft/lb
- Weight: 1.5kgs
- Overall length: 145mm



## 3401 1/2" HEAVY DUTY AIR MINI IMPACT WRENCH

### 1/2" 槍型氣動扳手(小型強力)

- Free speed: 12500rpm
- Bolt capacity: 5/8"
- Air inlet: 1/4"
- Air pressure: 90~120 psi
- Max torque: 300 ft/lb
- Weight: 1.5kgs
- Overall length: 145mm



## 3921 1/2" AIR IMPACT WRENCH

### 1/2" 槍型氣動扳手(前排)

- Free speed: 8000 rpm
- Bolt capacity: 3/4"
- Air inlet: 1/4"
- Air pressure: 90~120psi
- Torque: 460 ft/lb
- Ult torque: 550
- Weight: 2.45 kgs
- Overall Length: 7-3/8" (187mm)



## 3202 1/2" AIR IMPACT WRENCH (UNDER EXHAUST)

### 1/2" 槍型氣動扳手(下排)

- Free speed: 7000 rpm
- Bolt capacity: 3/4"
- Air inlet: 1/4"
- Air pressure: 90-120psi
- Torque: 460 ft/lb
- Average air consumption: 4 cfm
- Weight: 2.55 kgs
- Overall Length: 7-3/8" (187mm)



## 3319 1/2" AIR IMPACT WRENCH HIGH TORQUE

### 1/2" 槍型氣動扳手(強力型)

- Free speed: 5500 rpm
- Air inlet: 1/4"
- Bolt capacity: 1/2"
- Air pressure: 90 psi
- Torque: 50~730 ft/lbs
- Max torque: 800 ft/lbs
- Net weight: 2.38 kgs



### 3404 1/4" 90° AIR PALM RATCHET WRENCH

#### 1/4" 90° 氣動棘輪扳手(超短型)

- Free speed: 250rpm
- Max torque: 35nm
- Air inlet: 1/4"
- Air pressure: 90psi
- Weight: 0.45kgs
- Overall length: 125mm
- Exhaust system: Rear



### 3405 3/8" 90° AIR PALM RATCHET WRENCH

#### 3/8" 90° 氣動棘輪扳手(超短型)

- Free speed: 250rpm
- Max torque: 35nm
- Air inlet: 1/4"
- Air pressure: 90psi
- Weight: 0.45kgs
- Overall length: 125mm
- Exhaust system: Rear



### 3929 1/4" STUBBY AIR RATCHET WRENCH

#### 1/4" 90° 氣動棘輪扳手

- Free speed: 230 rpm
- Max torque: 50nm
- Air inlet: 1/4"
- Air pressure: 90psi
- Air consumption: 130 L/min
- Net weight: 0.5kg
- Overall Length: 165mm
- Exhaust system: Rear



### 3930 3/8" STUBBY AIR RATCHET WRENCH

#### 3/8" 90° 氣動棘輪扳手

- Free speed: 230 rpm
- Max torque: 50nm
- Air inlet: 1/4"
- Air pressure: 90psi
- Air consumption: 130 L/min
- Net weight: 0.5kg
- Overall Length: 165mm
- Exhaust system: Rear



### 3403 3/4" HEAVY DUTY AIR IMPACT WRENCH

#### 3/4" 槍型氣動扳手(強力型)

- Free speed: 7250rpm
- Bolt capacity: 1-1/2"
- Air inlet: 1/4"
- Air pressure: 90~120 psi
- Max torque: 1100 ft/lb
- Weight: 4.1kgs
- Overall length: 217mm





## 3801 1/2" HEAVY DUTY AIR RATCHET WRENCH

### 1/2" 90° 氣動棘輪扳手

- Free speed: 160 rpm
- Max torque: 100nm
- Air inlet: 1/4"
- Air pressure: 90psi
- Air consumption: 200 L/min
- Net weight: 1.2kg
- Overall Length: 230mm
- Planet gear mechanism: 2Gear
- Exhaust system: Rear

## 3407 1/2" 90° SUPER DUTY AIR RATCHET WRENCH

### 1/2" 90° 氣動棘輪扳手(玉米柄)

- Free speed: 160rpm
- Max torque: 81nm
- Air inlet: 1/4"
- Air pressure: 90psi
- Weight: 1.13kgs
- Overall length: 260mm
- Exhaust system: Adjustable

## 3832 1/2" 90° AIR RATCHET WRENCH

### 1/2" 90° 氣動棘輪扳手(無後作力)

- Free speed: 350 rpm
- Max torque: 100nm
- Air inlet: 1/4"
- Air pressure: 90psi
- Air consumption: 250 L/min
- Net weight: 1.58kg
- Overall Length: 300mm
- Clutch mechanism: pin clutch

## 3101 MINI AIR DIE GRINDER

### 氣動小支砂輪機

- Free speed: 25000 rpm
- Collet size: 6mm(1/4")
- Air inlet: 1/4"
- Air pressure: 90psi
- Air consumption: 300 L/min
- Net weight: 0.4kg
- Overall Length: 140mm
- Exhaust system: Rear

## 3822 AIR DIE GRINDER

### 氣動大支砂輪機

- Free speed: 22000 rpm
- Collet size: 6mm(1/4")
- Air inlet: 1/4"
- Air pressure: 90psi
- Air consumption: 350 L/min
- Net weight: 0.6kg
- Overall Length: 175mm
- Exhaust system: Rear

## 3823 DECAL REMOVER

### 氣動去膠輪機

- Free speed: 4000 rpm
- Collet size: 5/8"-24T
- Air inlet: 1/4"
- Air pressure: 90psi
- Air consumption: 300 L/min
- Net weight: 0.86kg
- Overall Length: 225mm
- Exhaust system: Rear



### 3831 AIR SAW

#### 氣動鋸(一般型)

- Blow per min: 9000bpm
- Overall length: 235mm
- Net weight: 0.75kg
- Air inlet: 1/4"pt
- Hose size: 1/4"



### 3821 AIR BODY SAW

#### 消音型氣動鋸


- 4800 rapid strokes per minute.
- Heavy duty construction for extended tool life.
- Ergonomic rubber grip reduces vibration and provides operator comfort.



### 3825 AIR SPOT DRILL

#### 槍型點焊去除鑽(附夾頭)

- Free speed: 1800 rpm
- Air inlet: 1/4"
- Air pressure: 90psi
- Air consumption: 283 L/min
- Drill capacity(D.I.A): 8 mm
- Hose size(ID): 9.5 mm
- Length: 254 mm
- Weight: 2.2 kgs

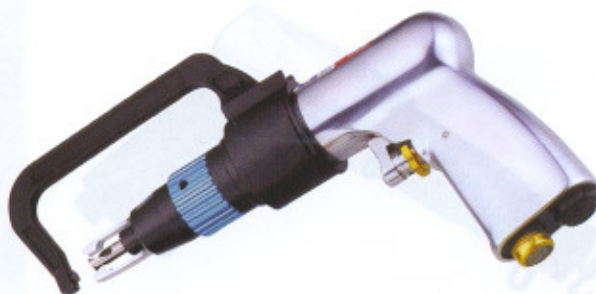

### 3833 AIR ANGLE DRILL

#### 彎頭氣動鑽

- Free speed: 1900 rpm
- Chuck size: 10 mm (3/8")
- Air inlet: 1/4"
- Air pressure: 90psi
- Air consumption: 280 L/min
- Length x Height: 190 x 110mm
- Net Weight: 0.96 kg
- Exhaust system: Rear




### 3320 AIR REVERSIBLE DRILL

#### 槍型正逆轉氣動鑽

- Free speed: 2000 rpm
- Air inlet: 1/4"
- Average air consumption: 4 cfm
- Chuck range: 1/16"-3/8"; 24 UNF
- Net weight: 1.08 kgs
- Length: 194mm
- Reversible





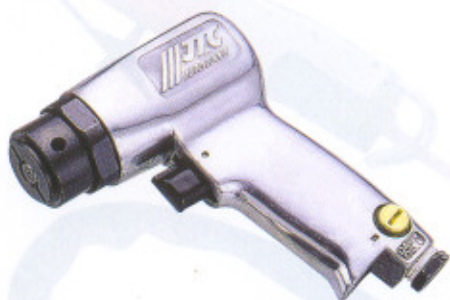

## 3824 AIR SANDER

### 氣動高速散打


- Pad size: Dia 3", 4-1/2", 5"
- Free speed: 16000 rpm
- Air inlet: 1/4"
- Air pressure: 90psi
- Air consumption: 350 L/min
- Net weight: 1.2kg
- Length x height: 140 x 160mm
- Exhaust system: Rear



## 3309 AIR HAMMER

### 190型氣動鎚


- Stroke speed: 3200 bpm
- Air inlet: 1/4"
- Piston stroke: 67mm
- Net weight: 1.6 kgs
- Length: 175 mm
- With chisels (175mmL) x 2 pcs

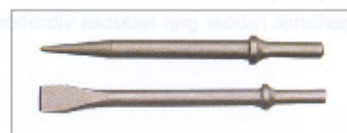

## 3310 AIR HAMMER

### 250型氣動鎚

- Stroke speed: 2100 bpm
- Air inlet: 1/4"
- Piston stroke: 89mm
- Net weight: 2.0 kgs
- Length: 225 mm
- With chisels (175mmL) x 2 pcs

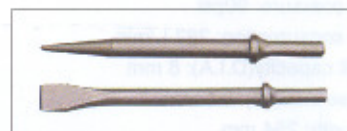

## 3208 UNIVERSAL JOINT

### 入風萬向接頭(360度)

- Air inlet size: 1/4" pt
- Revolve 360° in transverse or vertical way.
- Use under high pressure up to 15 kgf/cm<sup>2</sup>.



## 3433 PNEUMATIC TOOL OIL

### 氣動工具專用油

- Capacity: 250c.c.
- Ingredients: SPINDLE OIL #10.



## 3324 MAGNETIC AIR WRENCH SUPPORT

### 附磁氣動扳手支架

- With power magnetic to support the air wrench and sockets.
- Allow to increase your working efficiency.
- Tidy arrangement for workshop.





### 點焊去除鑽頭 POINTED END MILL

• Material: HSCO

編號 Item	規格 Spec
<b>3826</b>	6mm x 45L
<b>3827</b>	8mm x 45L
<b>3828</b>	6mm x 70L
<b>3829</b>	8mm x 80L



### 3321 SPOT WELD CUTTER KIT


#### 更換型點焊去除鑽組

- Quick drills out spot weld on fenders, doors, etc. K.
- Retractable pilot assures accurate cut.
- Double edged cutting blade assures long using life.
- 500 rpm working and 1/4" arbors.
- Contents: 3/8" spot weld cutter x 1 pc; 3/8" spot weld blade x 2 pcs  
5/16" spot weld cutter x 1 pc; 5/16" spot weld blade x 2 pcs  
Tip for spot weld cutter x 2 pcs; Hex wrench x 1 pc



### 去膠輪片 ERASER PAD

編號 Item	規格 Spec
<b>3731</b>	3-1/2" screw arbor
<b>3732</b>	3-1/2" rod arbor

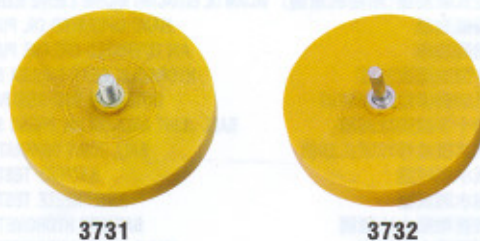

### 菜瓜布 COATING REMOVAL UTILITY DISC

編號 Item	規格 Spec
<b>3733</b>	4-1/2" with pads
<b>3734</b>	6" without pads
<b>3735</b>	6" with pads



### 鋸片 SAW BLADES

編號 Item	規格 Spec
<b>3736</b>	32T bi-metal air saw blade
<b>3737</b>	24T x 12" (HSS)
<b>3738</b>	32T x 12" (HSS)



### 氣動錘用鑿刀 CHISEL

- Made by Chrome-Molybdenum material.

編號 Item	規格 Spec	長度 Length
<b>3326</b>	尖 Shape	175
<b>3327</b>	平 Flat	175
<b>3328</b>	圓凸 Round Raised	150



3328

